iD Inspiration Click PLUS

LUXURY VINYL TILES

Highlight the texture with Plus

Tarkett

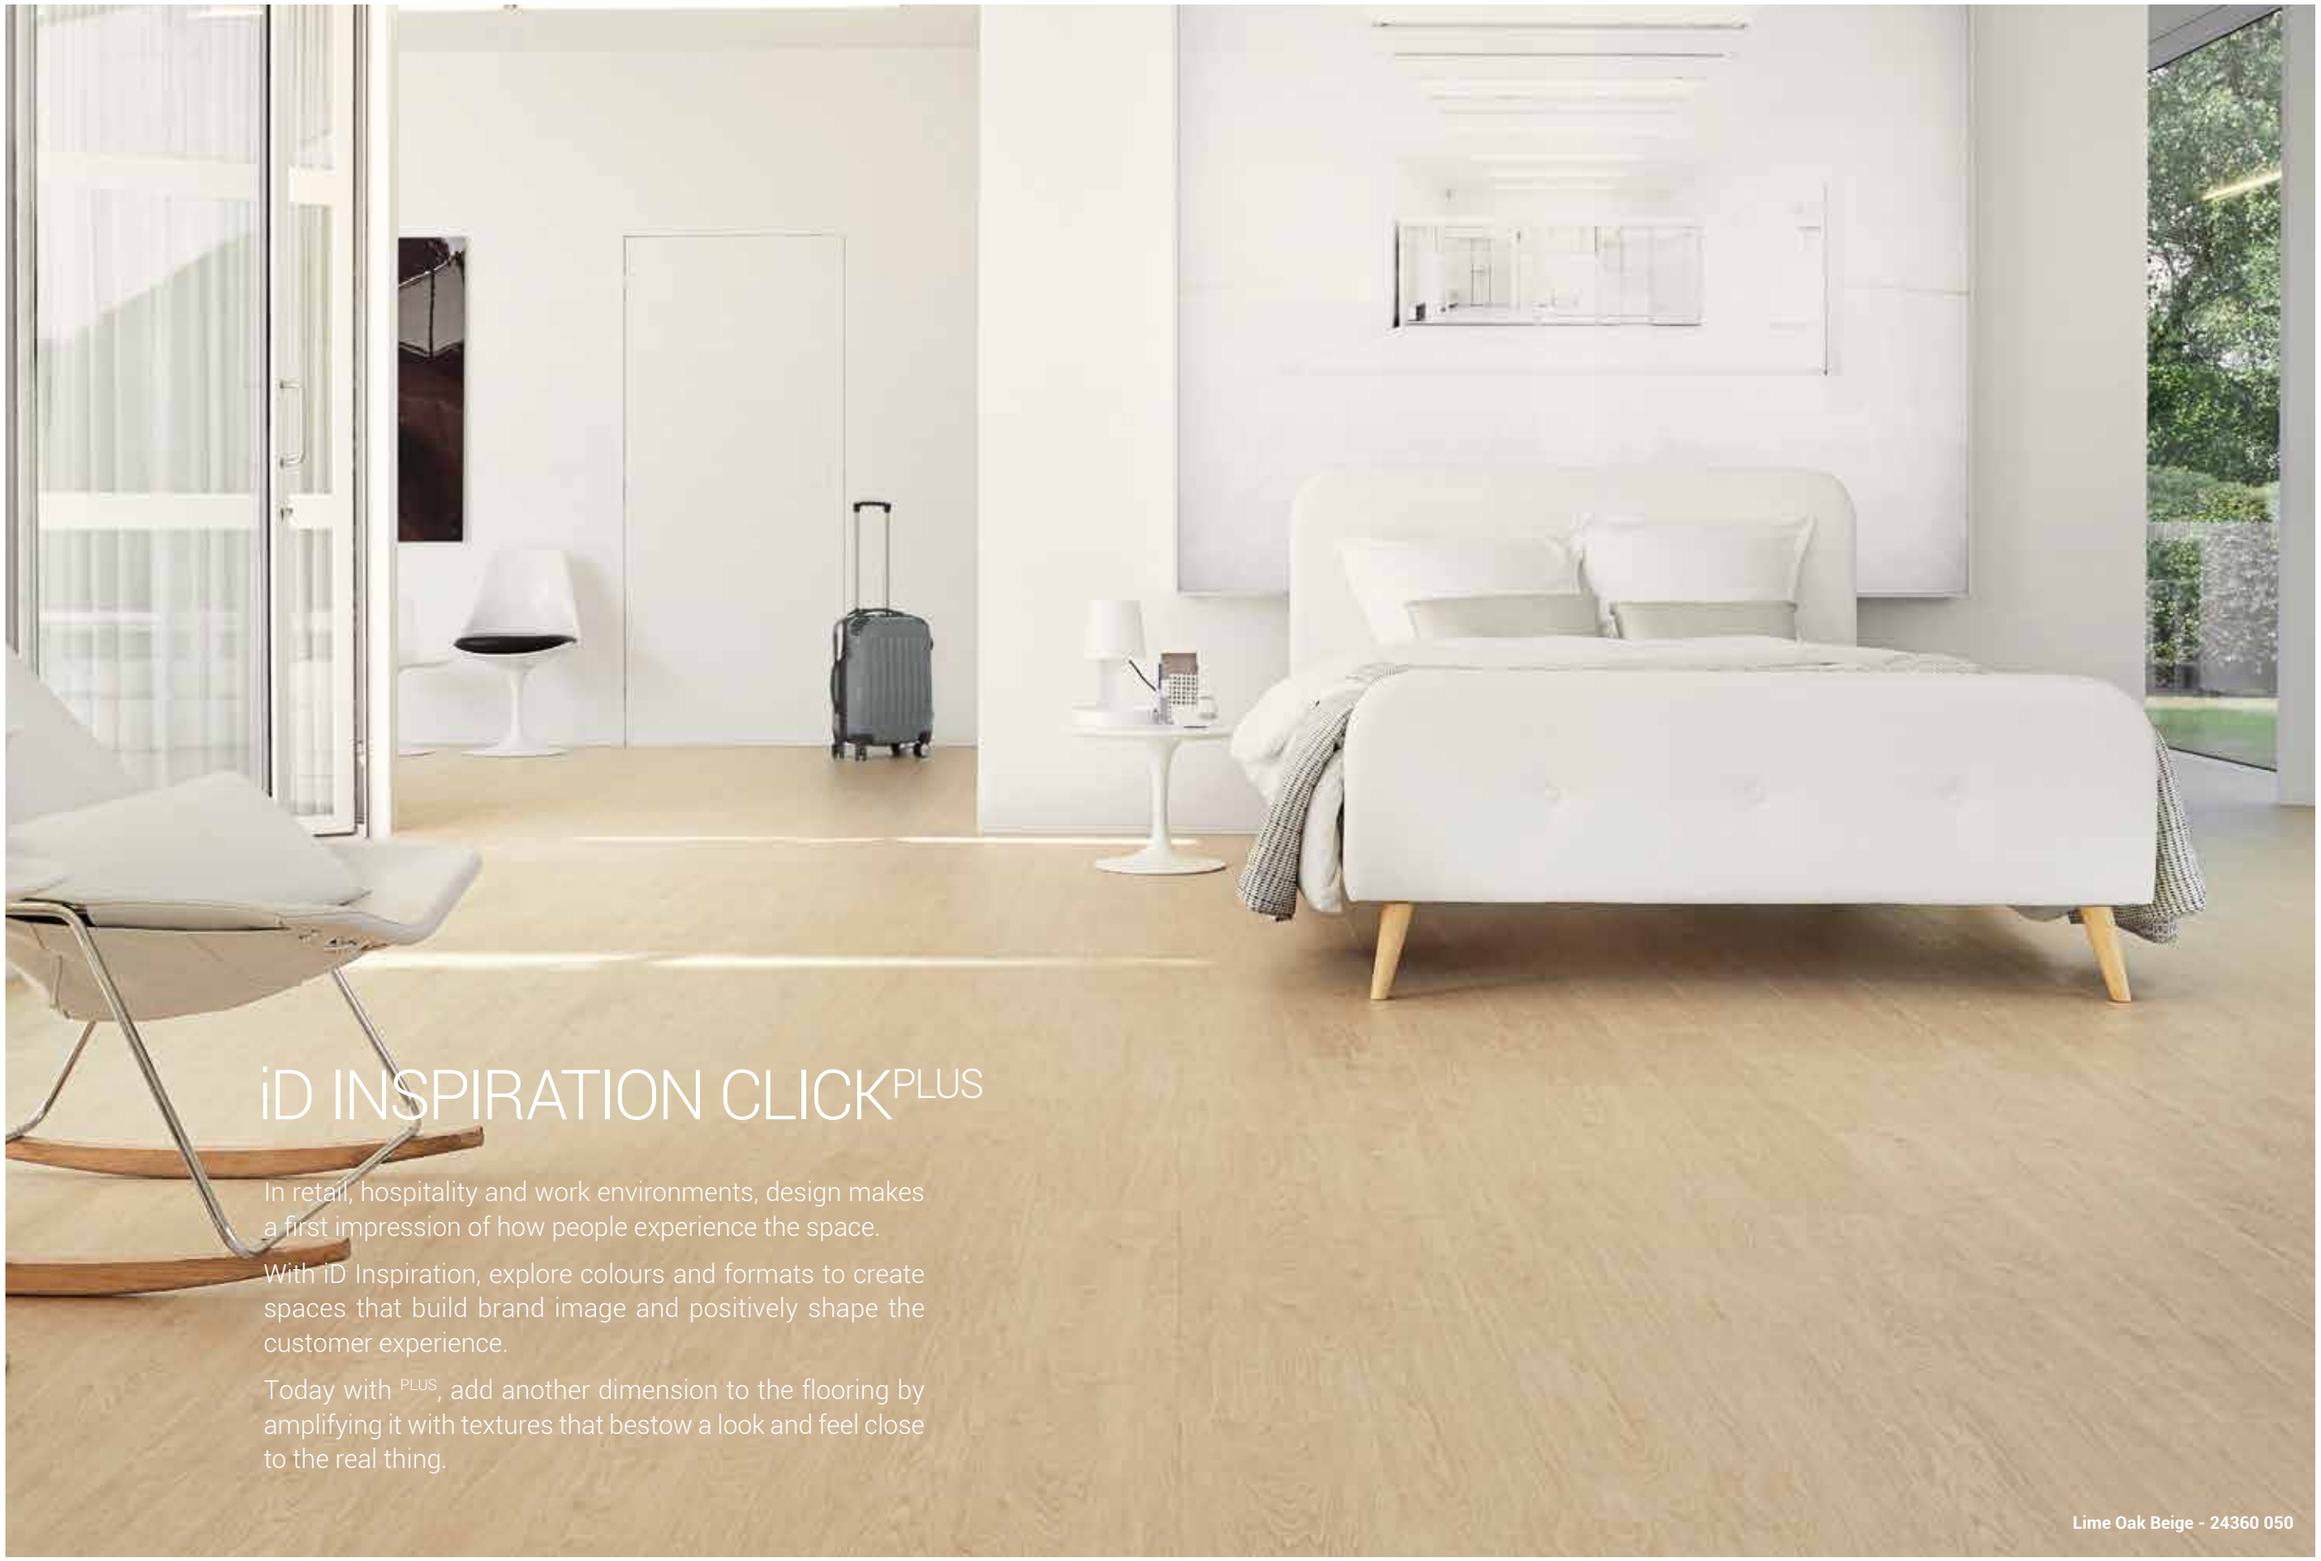

iD INSPIRATION CLICK PLUS

In retail, hospitality and work environments, design makes a first impression of how people experience the space.

With iD Inspiration, explore colours and formats to create spaces that build brand image and positively shape the customer experience.

Today with PLUS, add another dimension to the flooring by amplifying it with textures that bestow a look and feel close to the real thing.

Lime Oak Beige - 24360 050

iD INSPIRATION CLICK^{PLUS}

To expand the luxurious iD Inspiration Click collection, 4 patterns and 22 different colours have been created with the embossing in register technology. This technique engraves effects onto planks and tiles that reproduce wood or stone's natural essence. As light travels across the floor, the grain or pattern is reflected, reproducing a lifelike finish all around you. iD Inspiration Click^{PLUS} offer the best of raw design with the easy installation and maintenance of the LVT.

FULLY CUSTOMIZABLE COLLECTION

- iD Inspiration offers endless combinations through your choice of format, design, surface structure and beveling. Every aspect of the product is customizable with all decors.

LIFE-LONG PERFORMANCE

- Highly resistant to the daily wear and tear of even the most demanding commercial areas.
- 10 years limited guarantee for commercial use and 20 years limited guarantee for residential use.

SUSTAINABLE DESIGN

- Contributes to people's well-being and can be reused at end-of-life in other products.

THE IDEAL BLEND OF DURABILITY AND SUSTAINABILITY

Better Indoor Air Quality

- Designed to improve indoor air quality with VOC emissions below quantifiable levels, under 10µg/m^3 after 28 days.

Hard Wearing and Easy Cleaning

- Treated with TopClean XP™ for a tougher surface and simpler care.

PRODUCT CONSTRUCTION iD INSPIRATION CLICK^{PLUS}

1. **TopClean XP™ PUR reinforcement** for extreme resistance and easy, low-cost maintenance
2. **Surface with Embossing in register technology** for a more natural look
3. **0.55mm pure PVC transparent wear layer** for a hard-wearing, indentation-resistant surface compatible with class 33 (heavy commercial) and 42 (general industrial) use
4. **22 high definition print designs**
5. **Core layer with glass-fibre reinforcement** for exceptional dimensional stability and superior performance against tears and indentations
6. **Stabilising layer** for a curl-free product
7. **Fold-down Click System**

Legacy Pine Medium Grey - 24360 155
Legacy Pine Brown - 24360 157

LIME OAK

This classic oak is fullfilling nearly every demand. A coordinated range of 9 colours from light to dark, allows mixing and matching within the range. By combining those colours you are able to create unique floorplans with a sophisticated look and feel.

24360050 19,05 x 121,10
Skirting: 26640 763 LRV: 42.51%

24360048 19,05 x 121,10
Skirting: 26640 761 LRV: 50.74%

24360049 19,05 x 121,10
Skirting: 26640 762 LRV: 48.42%

24360051 19,05 x 121,10
Skirting: 26640 764 LRV: 35.85%

24360052 19,05 x 121,10
Skirting: 26640 765 LRV: 31.90%

24360053 19,05 x 121,10
Skirting: 26640 766 LRV: 27.00%

24360054 19,05 x 121,10
Skirting: 26640 767 LRV: 18.97%

24360055 19,05 x 121,10
Skirting: 26640 768 LRV: 14.61%

24360056 19,05 x 121,10
Skirting: 26640 769 LRV: 8.25%

Lime Oak Beige - 24361 060

ALPINE OAK

Inspired by aged and dyed oak, this vibrant wood is adding authenticity to industrial or rustical ambiances. One natural shade followed by four deep and rich colours are supporting the matching embossing of these products.

24361060 24,05 x 149,10
Skirting: 26640 773 LRV: 7.71%

24361057 24,05 x 149,10
Skirting: 26640 770 LRV: 28.32%

24361058 24,05 x 149,10
Skirting: 26640 771 LRV: 10.13%

24361059 24,05 x 149,10
Skirting: 26640 772 LRV: 22.39%

24361061 24,05 x 149,10
Skirting: 26640 774 LRV: 45.76%

Alpine Oak Black - 24361 060

LEGACY PINE

The Legacy Pine design is showing the essence of natural wood in 4 colourations which are carefully selected to match this beautiful design. Small signs of use are also a part of this product and highlighted by a fine surface structure which looks like hand crafted.

24360155 19,05 x 121,10
Skirting: 26640 776 LRV: 33.02%

24360154 19,05 x 121,10
Skirting: 26640 775 LRV: 44.31%

24360156 19,05 x 121,10
Skirting: 26640 777 LRV: 12.24%

24360157 19,05 x 121,10
Skirting: 26640 778 LRV: 11.97%

Legacy Pine Medium Grey - 24360 155
Legacy Pine Brown - 24360 157

ROUGH CONCRETE

Rough Concrete is neutral but exiting at the same time. The embossing is highlighting the colour coordinated design and delivers a cool and contemporary athmosphere.

24363157 49,05 x 99,10
Skirting: 26640 779 LRV: 43.67%

24363158 49,05 x 99,10
Skirting: 26640 780 LRV: 34.27%

24363159 49,05 x 99,10
Skirting: 26640 781 LRV: 22.19%

24363160 49,05 x 99,10
Skirting: 26640 782 LRV: 7.77%

Rough Concrete White - 24363 157

TECHNICAL DATA

Certification & classification	Standards	iD Inspiration Click^{PLUS}
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
CE certification	EN 14041	Yes
Classification	EN ISO 10874	Domestic: 23 Commercial: 33 Industrial: 42
Technical characteristics		
Total thickness	EN ISO 24346	4 5 mm
Wear layer thickness	EN ISO 24340	0 55
Surface treatment (PUR)		Yes - TopCleanXP™
Total weight	EN ISO 23997	8000 g/m²
Beveled edges		Yes
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342	
	Planks	19.05 x 121.10 cm - 7 planks/box = 1.61 m^2 24.05 x 149.10 cm - 5 planks/box = 1.79 m^2
	Tiles	49.05 x 99.10 cm - 3 tiles/box = 1.46 m^2
Technical performances		
Dimensional stability	EN ISO 23999	≤ 0,10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B_{fl}-s1
Residual indentation	EN ISO 24343-1	≤ 0 10 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔLw = 3 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C ($L_{n\,e\,w}$ < 85 dB)
Thermal resistance	EN ISO 10456	0 04 m² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Very good
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0 30
Electrical properties	EN 1815 EN 1081	< 2 kV on concrete ≥ 10^9 Ohm
Underfloor heating		Suitable - max. 27 °C
Adhesion wear layer	EN ISO 24345	≥ 50N / 50mm
Colours		22

The above information is subject to modification for the benefit of further improvement. (10/17).
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

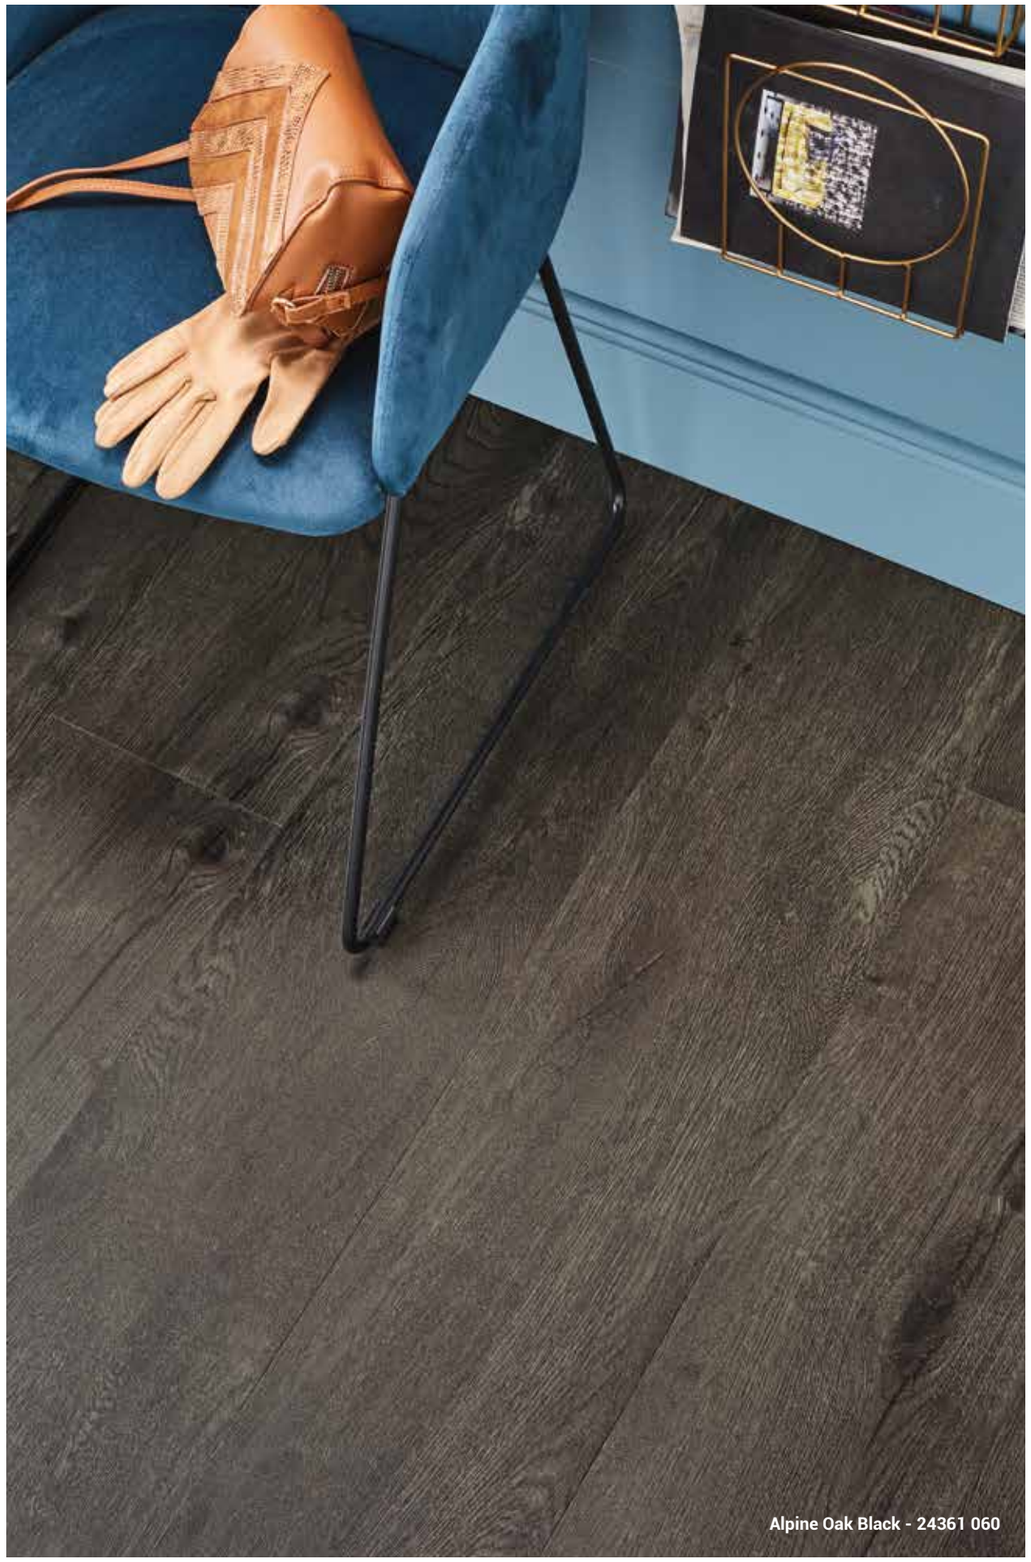

■ **WESTERN EUROPE: Austria:** Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ▪ **Belgium:** Tarkett Belux Sprl – Tel. +32 16 35 98 80 ▪ **Denmark:** Tarkett A/S – Tel. +45 43 90 60 11 ▪ **Finland:** Tarkett Oy – Tel. +358 9 4257 9000 ▪ **France:** Tarkett SAS – Tel. +33 1 41 20 42 49 ▪ **Germany:** Tarkett Holding GmbH, Bereich Objekt – Tel. +49 62 33 810 ▪ **Greece:** Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ▪ **Italy:** Tarkett S.p.A. – Tel. +39 0744 7551 ▪ **Luxembourg:** Tarkett GDL SA – Tel. +352 949 211 8804 ▪ **Netherlands:** Tarkett Holding GmbH, Vestiging Nederland – Tel. +31 416 685 491 ▪ **Norway:** Tarkett AS – Tel. +47 32 20 92 00 ▪ **Portugal:** Tarkett SA – Tel. +351 21 427 64 20 ▪ **Spain:** Tarkett Floors S.L – Tel. +34 91 358 00 35 ▪ **Sweden:** Tarkett Sverige AB – Tel. +46 771 25 19 00 ▪ **Switzerland:** Tarkett Holding GmbH, Bereich Objekt Schweiz – Tel. +41 043 233 79 24 ▪ **Turkey:** Tarkett Aspen - Tel. +90 212 213 65 80 ▪ **United Kingdom:** Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE: Baltic Countries:** Tarkett Baltics: Tel. +370 37 262 220 ▪ **Czech Republic:** Tarkett org. složka – Tel: +420 271 001 600 ▪ **Hungary:** Tarkett Polska SP Z.O.O. magyarországi fióktelepe – Tel. +36 1 437 8150 ▪ **Poland:** Tarkett Polska Sp. z o. o. – Tel. +48 22 16 09 231 ▪ **Russian Federation:** ZAO Tarkett RUS - Tel. +7 495 775 3737 ▪ **Slovakia:** Tarkett Polska, organizačná zlozka – Tel. +421 2 48291 317 ▪ **South East Europe:** Tarkett SEE – Tel. +381 21 7557 649 (44) 569 12 21 ▪ **Ukraine:** Tarkett UA – Tel: +38 (0) 44 569 12 21 ■ **ASIA AND OCEANIA: Australia:** Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ▪ **China:** Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ▪ **North East Asia:** Tarkett Hong Kong Limited – Tel. +852 2511 8716 ▪ **India:** Tarkett France (India Branch) - Tel. +91 11 4352 4073 ▪ **South East Asia:** Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ **AFRICA: Tarkett International:** Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST: Tarkett Middle East:** Tel. +961 1 51 3363/4 ▪ **Israël:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA: USA:** Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. + 1 440 543 8916 ▪ **Canada:** Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA: Brazil:** Tarkett - Tel. 55 12 3954 7108 ▪ **Argentina - Chile - Uruguay:** Tarkett Latam Mercosur - Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ▪ **Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela:** Tarkett - Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ▪ **Mexico /Central America:** Tarkett Latam Mexico - Tel. +55 11 98410 9310

11/2017

Tarkett