


Reveal EcoBase™


Specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 "						
Aspect	ISO 2424	Tip-sheared						
Dye method	Solution dyed							
Dimension	EN ISO 24342	cm x cm	100 x 25 / 39,36" x 9,84" (20 planks per box)					
Primary backing	ISO 2424	Polyester fleece						
Secondary backing	ISO 2424	DESSO EcoBase® * - Containing at least 75% C2C positively defined recycled content						
Pile fibre composition	ISO 2424	BCF Polyamide 6 and ECONYL® (ECONYL® is made from 100% regenerated content) **						
Total thickness	ISO 1765	mm	6.5	inch	0.3			
Effective pile thickness	ISO 1766	mm	3.7	inch	0.15			
Total mass	ISO 8543	g/m ²	4100	oz/yd ²	121.0			
Total pile mass	ISO 2424	g/m ²	710	oz/yd ²	21.0			
Effective pile mass	ISO 8543	g/m ²	520	oz/yd ²	15.3			
Pile density	ISO 8543	g/cm ³	0.141	lb/in ³	0.0051			
Number of tufts	ISO 1763	/dm ²	2170	/yd ²	181434			
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	≤ 1 x 10 ⁹					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307	33 Commercial - heavy use						
Luxury rating	EN 1307	LC 2						
Dimensional stability	EN 986	%	≤ 0,2					
Impact sound reduction ΔL _w	ISO 10140	dB	25					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		α _s	0.01	0.03	0.10	0.21	0.35	0.40
Noise reduction	ISO 354	α _w	0.20					
Thermal resistance	ISO 8302	m ² .K/W	0.086					
Flammability	EN 13501-1	Bfl - s1 (loose laid tested)						
Prodis - GUT	www.pro-dis.info	56CD64BD						

CE EN 14041 0493-CPR-0002

Manufactured by:
Tarkett BV
Taxandriaweg 15
NL - 5142 PA Waalwijk



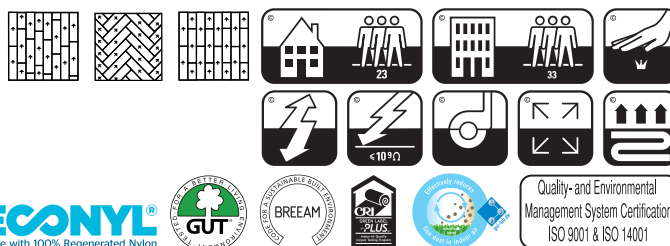

* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: professionals.tarkett.com

** ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: professionals.tarkett.com

Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognised trade standards. An effective, regular cleaning and maintenance programme is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, visit professionals.tarkett.com

EN-20180509